

B9 系列闭环型霍尔电流传感器
B9 Series Closed Loop Mode
Hall Effect Current Sensor

正角电子™



B9 系列闭环型霍尔电流传感器的初、次级之间是绝缘的，可用于测量直流、交流和脉冲电流。

B9 series current sensor is a closed loop device based on the principle of the hall effect, with a galvanic isolation between primary and secondary circuit. It provides accurate electronic measurement of DC, AC or pulsed currents.



电参数 Electrical data ($T_a=25^{\circ}\text{C} \pm 5^{\circ}\text{C}$)

Type	B9-125A	B9-200A	单位 Unit
额定输入电流(I_{pn}) Rated current(I_{pn})	± 125	± 200	A
测量电流范围(I_p) Measure range(I_p)	0— ± 185	0— ± 300	A
匝比 (Np/Ns) Turns ratio(Np/Ns)	1: 1000	1: 2000	T
次级线圈内阻 Coil resister	30	45	Ω
额定输出电流 Rated output	$\pm 125 \pm 0.5\%$	$\pm 100 \pm 0.5\%$	mA
电源电压 Supply voltage	$\pm 12, \pm 15$		V
功耗电流 Power Consumption	$\leq 20 + I_p X (Np/Ns)$		mA
失调电流 Offset current	$@ I_p = 0$	± 0.2	mA
失调电流温漂 Offset drift	$@ -40 \sim +85^{\circ}\text{C}$	$\leq \pm 0.5$	mA
线性度 Linearity	$@ I_p = 0 \pm I_{pn}$	≤ 0.1	%FS
响应时间 Response time	$@ 50\text{A}/\mu\text{s}, 10\%-90\%$	≤ 1	μs
绝缘电压 Galvanic isolation	$@ 50\text{Hz}, \text{AC}, 1\text{min}$	3	kV
带宽 Bandwidth	$@ -3\text{dB}$	0~200	KHZ

应用 Applications

- 变频调速系统

Variable speed drives

- 电焊机

Welding machine

- 通讯电源

Battery supplied applications


- 不间断电源 UPS

Uninterruptible Power Supplies (UPS)

- 电化学

Electrochemical

结构参数 Mechanical dimension(for reference only)

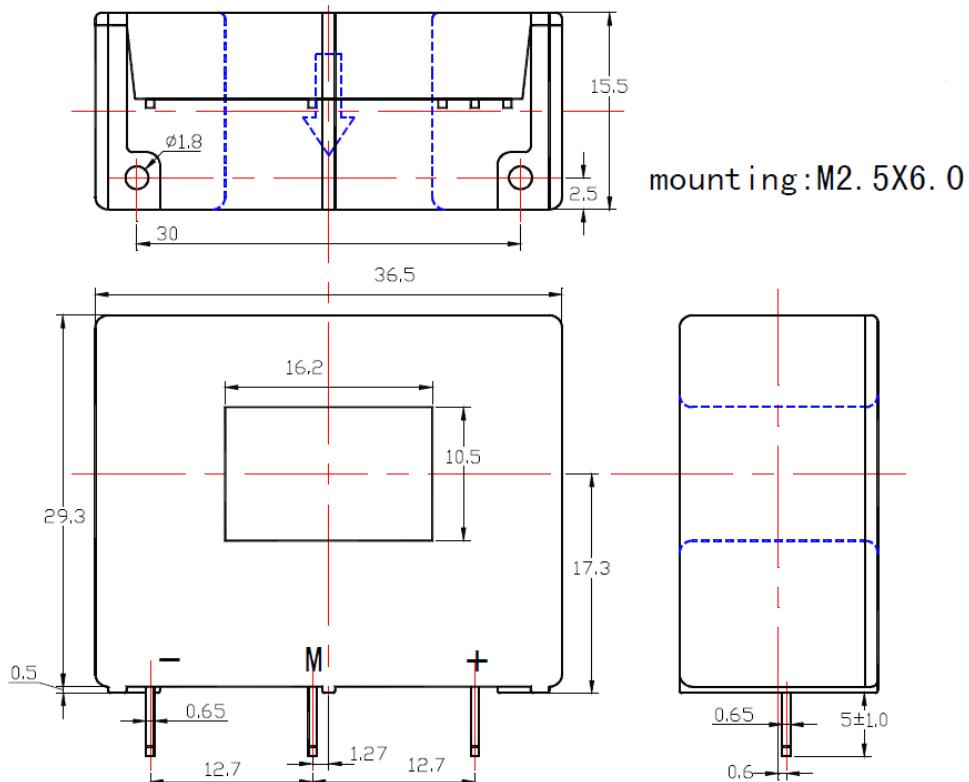

Remarks:

- All dimensions are in mm.
- General tolerance $\pm 1\text{mm}$.
- Elucidation: 1:+15V 2:-15V 3:I_{out}

使用说明 Directions for use

- 当测量电流按传感器箭头方向时，输出端获得同相电流。

When measure current flows according to the direction of the arrowhead, Output terminal gets the same phase current.

B9 系列闭环型霍尔电流传感器
B9 Series Closed Loop Mode
Hall Effect Current Sensor

2. 初级导体温度不应超过120°C。

The primary conductor should be $\leq 120^{\circ}\text{C}$.

3. 母排完全充满初级穿孔时动态表现 (di/dt 和响应时间) 为最佳。

The dynamic performance (di/dt and the response time) is the best when the primary hole is fully filled with the bus bar.

4. 为了达到最佳的磁耦合, 初级线匝应绕在传感器顶部。

The primary turns should be at the top of the sensor for the best magnetic coupling.

5. 当待测电流从传感器穿过, 即可在输出端测得电压大小。(注意: 错误的接线可能导致传感器损坏)

When the current will be measured goes through a sensor, the voltage will be measured at the output end.

(Note: The false wiring may result in the damage of the sensor)

6. 可按用户需求定制不同额定输入电流和输出电流的传感器。

Custom design in the different rated input current and the output current are available.

执行标准 Standards

- UL94-V0.
- EN60947-1:2004
- IEC60950-1:2001
- EN50178:1998
- SJ 20790-2000


总体参数 General data

	数值 Value	单位 Unit
工作温度 (TA) Operating temperature	-40 to +85	$^{\circ}\text{C}$
储存温度 (TS) Storage temperature	-40 to +125	$^{\circ}\text{C}$
毛重(约) (M) Mass(approx)	20	g

特性图 Characteristics chart

脉冲电流信号响应特性


Pulse current signal response characteristic



输入信号
(Input signal)
输出信号
(Output signal)

抗脉冲电压干扰特性

Effects of impulse noise

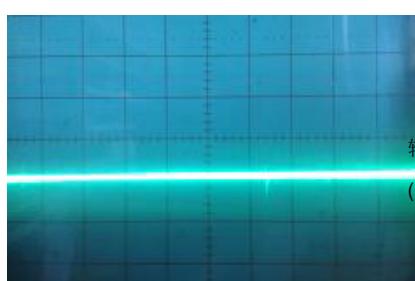

输出电压
(Output voltage)