


B100 系列多量程闭环型霍尔电流传感器
B100 Series Multi-range Closed Loop Mode
Hall Effect Current Sensor

正角电子™



B100 多量程闭环型霍尔电流传感器的初、次级之间是绝缘的，可用于测量直流、交流和脉冲电流。

B100 series multi-range current sensor is a closed loop device based on the measuring principle of the hall effect and null balance method, with a galvanic isolation between primary and secondary circuit. It provides accurate electronic measurement of DC, AC or pulsed currents.



电参数 Electrical data (Ta=25°C ± 5°C)

Type	B100-6A	B100-15A	B100-25A	B100-50A	单位 Unit
额定输入电流 (Ipn) Rated current (Ipn)	6	15	25	50	A
测量电流范围 (Ip) Measure range (Ip)	19.2	48	80	150	A
匝比 (Np/Ns) Turns ratio(Np/Ns)	1: 960	1: 1200	1: 1000	1: 1000	T
内接取样电阻 Internal resister	100±0.1%	50±0.1%	25±0.1%	12.5±0.1%	Ω
额定输出电压 Rated output	@Ip=±Ipn ±0.625±0.5%				V
电源电压 Supply voltage	+5V				V
功耗电流 Power Consumption	≤20+ IpX(Np/Ns)				mA
零点电压 Zero voltage	@Ip=0 +2.5±0.5%				V
零点电压温漂 Zero voltage drift	@ -40~+85°C ≤±0.5				mV / °C
线性度 Linearity	@Ip=0-±Ipn ≤0.1				%FS
总精度 Total precision	≤±0.7				%
di/dt 跟随精度 di/dt accurately followed	>50				A / μ S
响应时间 Response time	@100A/μ S, 10%-90% ≤500				ns

B100 系列多量程闭环型霍尔电流传感器
B100 Series Multi-range Closed Loop Mode
Hall Effect Current Sensor

绝缘电压 Galvanic isolation	@ 50HZ,AC,1min	2.5	KV
带宽 Bandwidth	@ -1db	DC~200	KHZ

应用 Applications

- 交流变速驱动器

AC variable speed drives

- 直流电机驱动静态转换器

Static converters for DC motor drives

- 通讯电源

Battery supplied applications

- 不间断电源 UPS

Uninterruptible Power Supplies (UPS)


- 开关电源

Switched Mode Power Supplies (SMPS)

- 电焊机

Power supplies for welding applications

结构参数 Mechanical dimension(for reference only)


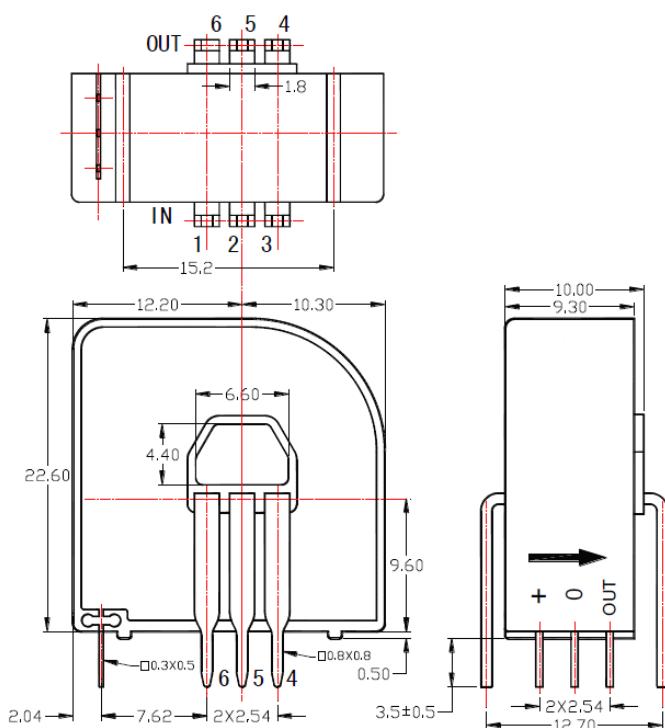


Remarks:

- All dimensions are in mm.
- General tolerance $\pm 1\text{mm}$.

接线图 Pin connections

B100 系列多量程闭环型霍尔电流传感器
B100 Series Multi-range Closed Loop Mode
Hall Effect Current Sensor

匝数 Turns	初级额定电流 IPN (A) Primary rated current	额定输出电流 Vout (V) Rated output voltage	初级电阻 [mΩ] Primary impedance	初级电感 [uH] Primary inductance	连接点 Connect point
1	±6 (±15, ±25, ±50)	2.5±0.625	0.18	0.013	
2	±3 (±7.5, ±12.5, ±25)	2.5±0.625	0.81	0.05	
3	±2 (±5, ±8.3, ±16.6)	2.5±0.625	1.62	0.12	

使用说明 Directions for use

1. 当待测电流从传感器穿过，即可在输出端测得电压大小。(注意：错误的接线可能导致传感器损坏)

When the current will be measured goes through a sensor, the voltage will be measured at the output end. (Note: The false wiring may result in the damage of the sensor)

2. 可按用户需求定制不同额定输入电流和输出电压的传感器。

Custom design in the different rated input current and the output voltage are available.

执行标准 Standards

- UL94-V0.
- EN60947-1:2004
- IEC60950-1:2001
- EN50178:1998
- SJ 20790-2000


总体参数 General date

	数值 Value	单位 Unit
工作温度 (TA) Operating temperature	-40 to +85	°C
储存温度 (TS) Storage temperature	-40 to +125	°C
毛重(约) (M) Mass(approx)	10	g

特性图 Characteristics chart

脉冲电流信号响应特性

Pulse current signal response characteristic

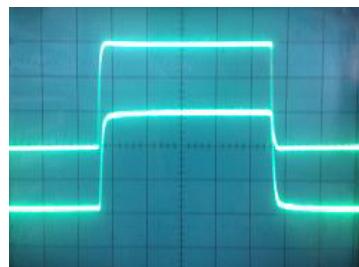

输入信号

(Input signal)

输出信号

(Output signal)

抗脉冲电压干扰特性

Effects of impulse noise



输出电压

(Output voltage)